



interdive

TWINLOCK AIR CHAMBER

SPECIFICATION SHEET

Tel: +44(0)1803 311222
email: info@interdive.co.uk
website: www.interdive.co.uk

TWINLOCK AIR CHAMBER

CONTAINER SPECIFICATIONS

Container ID:	TG-01-DDC
Length:	4,500mm
Length when doors open:	5,450mm
Width:	2,850mm
Width with doors open:	5,100mm
Height:	2,600mm
Weight (gross):	7,700Kg
Weight (tare):	3,600Kg
Weight (payload):	4,100Kg

CONTAINER FEATURES

Container emergency lighting

Recessed penetration plate

Double side doors

Personnel door

Portable fire extinguisher

Ambient analyser

Diver 1 and 2 19" monitors

Container heating system

SUPPLIED

Stretcher

DMAC medical kit

First aid station

Stop watch

Torch

Knocking hammer


Wennol emergency oxygen system

Spares package

Main / entry lock - O-ring

Depth gauge

Indicating gauge

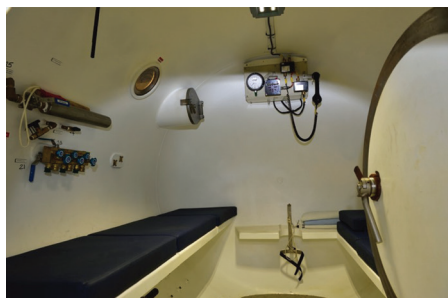

CHAMBER DETAILS

Description:	2m twinlock chamber
Serial number:	00385
Manufacturer:	IHC Hytech
Manufactured:	2006
Length:	3,500mm
Diameter:	2,000mm
Working pressure:	50msw
Viewports:	1 x EL, 1 x ML

CHAMBER VOLUME

Main lock: 8.24m³

Entry lock: 3.8m³

CHAMBER FEATURES

Hyperbaric fire extinguisher in each lock

2 x bunks c/w fire retardant bedding

Medical lock

BIBS in main lock and entry lock

Hytech communications system

Sound powered phone in each lock

LED lighting

CONTROL PANEL

Raised walkway

Hytech communications system

Sound powered phone

SAT Systems combined O² and CO² analysers

ELECTRICAL SPECIFICATIONS

Power inlet: 32amp 110v 3ph

Electrical rating: Atex rated zone II

Cable: 20m 3 core armoured BS6883 3.5Kva

Tel: +44(0)1803 311222
 email: info@interdive.co.uk
 website: www.interdive.co.uk